

Locally connected spanning trees on graphs

Ching-Chi Lin^{*†‡}

Gerard J. Chang[§]

Gen-Huey Chen^{*¶}

February 1, 2008

Abstract

A locally connected spanning tree of a graph G is a spanning tree T of G such that the set of all neighbors of v in T induces a connected subgraph of G for every $v \in V(G)$. The purpose of this paper is to give linear-time algorithms for finding locally connected spanning trees on strongly chordal graphs and proper circular-arc graphs, respectively.

Keywords: algorithm, circular-arc graph, directed path graph, interval graph, locally connected spanning tree, proper circular-arc graph, strongly chordal graph.

^{*}Department of Computer Science and Information Engineering, National Taiwan University, Taipei 10617, Taiwan.

[†]Email: d91018@csie.ntu.edu.tw.

[‡]Institute of Information Science, Academia Sinica, Nankang, Taipei 11507, Taiwan.

[§]Department of Mathematics, National Taiwan University, Taipei 10617, Taiwan. Email: gjchang@math.ntu.edu.tw. Supported in part by the National Science Council under grant NSC93-2213-E-002-028. Member of Mathematics Division, National Center for Theoretical Sciences at Taipei.

[¶]Email: ghchen@csie.ntu.edu.tw.

1 Introduction

Communication networks or power transmission networks are often modelled as graphs G . The vertices in $V(G)$ represent sites in the network and the edges in $E(G)$ represent communication lines or power transmission lines. When delivering a message to a remote site on a communication network, it is transferred by a path consisting of many communication lines. Similarly, power transmission between source site and destination site is accomplished by a serial of power transmission lines. It is inexpensive to construct such networks as tree networks. However, one single site failure would influence the whole network. In order to guarantee the quality of service, Farley [5, 6] proposes *isolated failure immune* (IFI) networks.

Two site failures are *isolated* if the sites are not adjacent. A network is *immune* to a set of failures if transmission between operative sites can be completed under such failures. A graph is a *2-tree* if it is either a 2-clique or it can be produced by adding a new vertex v and two edges vx and vy to a 2-tree such that xy is an edge of the 2-tree. It has been shown that an IFI network is minimum if and only if it is a 2-tree [5, 14]. Cai [2, 3] introduced the concept of locally connected spanning tree and showed that a network containing a locally connected spanning tree is an IFI network. A *locally connected spanning tree* of a graph G is a spanning tree T such that the set of all neighbors of v in T induce a connected subgraph of G for every $v \in V(G)$. Figure 1 shows a graph G with a locally connected spanning tree T_1 and a non-locally connected spanning tree T_2 . Notice that the set of all neighbors of u (respectively, v) in T_2 induces a disconnected subgraph in G .

Cai [3] proved that determining whether a graph contains a locally connected spanning tree is NP-complete for planar graphs and split graphs. Furthermore, he also gave a linear-time algorithm for finding a locally connected spanning tree of a directed path graph, and a linear-time algorithm for adding fewest edges to a graph to make a given spanning tree of the graph a locally connected spanning tree of the augmented graph. Since split graphs are chordal, determining whether a graph contains a locally connected spanning tree is NP-

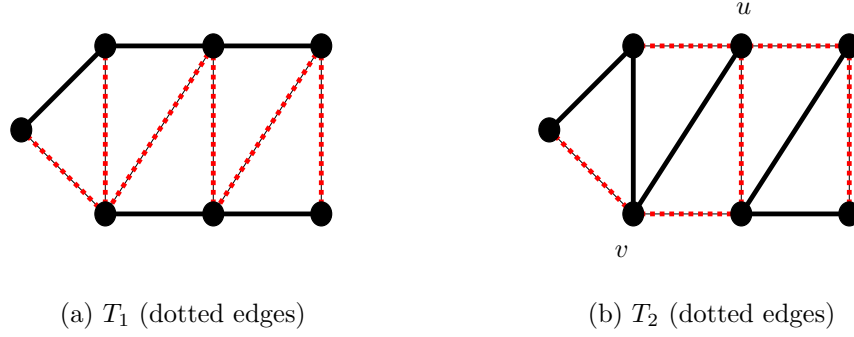


Figure 1: Graph G with spanning trees T_1 and T_2 .

complete for chordal graphs. It is well known that the family of strongly chordal graphs is a proper subfamily of the family of chordal graphs, and is a proper superfamily of the family of directed path graphs. In this paper, we give linear-time algorithms for finding locally connected spanning trees on strongly chordal graphs and proper circular-arc graphs, respectively. The former answers an open problem proposed by Cai [3].

The remainder of the paper is organized as follows. Section 2 describes and analyzes our algorithm for strongly chordal graphs. Section 3 describes and analyzes our algorithm for proper circular-arc graphs. Section 4 concludes the paper with an open question.

We conclude this section at the following two lemmas which are useful in this paper. A *separating set* S of a graph G is a set $S \subseteq V(G)$ such that $G - S$ has more than one component. A *cut-vertex* is a vertex that forms a separating set. A graph is k -*connected* if it contains no separating set of size less than k . For $S \subseteq V(G)$, the *subgraph induced by* S is the graph $G[S]$ whose vertex set is S and edge set $\{xy \in E(G) : x, y \in S\}$.

Lemma 1 ([3]) *If G has a locally connected spanning tree T and S is a separating set of G , then $G[S]$ contains at least one edge of T . Consequently, a graph having a locally connected spanning tree is 2-connected.*

Lemma 2 *Suppose $\{x, y\}$ is a separating set of G and H is a component of $G - \{x, y\}$. If H contains no common neighbor of x and y , then G has no locally connected spanning tree.*

Proof. Suppose to the contrary that G has a locally connected spanning tree T . Then there exists a vertex of H connecting x or y , say x , through an edge in T . Notice that $\{x, y\}$ is a separating set of G , so T contains the edge xy . Since the neighborhood of x in T induces a connected subgraph in G , y is connected to $H[N_T(x)]$, which implies x and y have a common neighbor in H , a contradiction. $\square$

2 Algorithm for strongly chordal graphs

This section establish a linear-time algorithm for determining whether a strong chordal graph has a locally connected spanning tree, and producing one if the answer is positive. First, some preliminaries on strongly chordal graphs.

A graph is *chordal* (or *triangulated*) if every cycle of length greater than three has a chord, which is an edge joining two noncontiguous vertices in the cycle. The *neighborhood* $N_G(v)$ of a vertex v is the set of all vertices adjacent to v in G ; and the *closed neighborhood* $N_G[v] = N_G(v) \cup \{v\}$. A vertex v is *simplicial* if $N_G[v]$ is a clique. For any ordering $(v_1, v_2, \dots, v_n)$ of $V(G)$, let G_i denote the subgraph of G induced by $\{v_i, v_{i+1}, \dots, v_n\}$. It is well known [7] that a graph G is chordal if and only if it has a *perfect elimination order* which is an ordering $(v_1, v_2, \dots, v_n)$ of $V(G)$ such that each v_i is a simplicial vertex of G_i .

A *strongly chordal* graph is a chordal graph such that every cycle of even length at least six has a chord that divides the cycle into two odd length paths. Farber [4] proved that a graph is strongly chordal if and only if it has a *strong elimination order* which is an ordering $(v_1, v_2, \dots, v_n)$ of $V(G)$ such that $N_{G_i}[v_j] \subseteq N_{G_i}[v_k]$ for $i \leq j \leq k$ and $v_j, v_k \in N_{G_i}[v_i]$. Notice that a strong elimination order is also a perfect elimination order. Anstee and Farber [1] presented an $O(n^3)$ -time algorithm, Hoffman, Kolen, and Sakarovitch [8] presented an $O(n^3)$ -time algorithm, Lubiw [9] presented an $O(m \log^2 m)$ -time algorithm, Paige and Tarjan [12] presented an $O(m \log m)$ -time algorithm and Spinrad [13] presented an $O(n^2)$ -time algorithm for finding a strong elimination order of a strongly chordal graph of n vertices and m edges.

According to Lemma 1, for a graph to have a locally connected spanning tree it is

necessary that the graph is 2-connected. We now give a necessary and sufficient condition for a chordal graph, and hence strongly chordal graph, to be k -connected.

Lemma 3 *Suppose $\sigma = (v_1, v_2, \dots, v_n)$ is a perfect elimination order of a chordal graph G and $k < n$ is a positive integer. Then, G is k -connected if and only if $|N_{G_i}(v_i)| \geq k$ for $1 \leq i \leq n - k$.*

Proof. Suppose $P = (v_{i_1}, v_{i_2}, \dots, v_{i_r})$ is a shortest v_i - v_n path. We claim that $i = i_1 < i_2 < \dots < i_r = n$. Assume to the contrary that $i_{s-1} > i_s$ for some $2 \leq s \leq r$. We may choose s to be as large as possible. As $i_r = n \geq i_{s-1} > i_s$, we have that $s \leq r - 1$. By the choice of s we also have $i_{s+1} > i_s$. Since v_s is a simplicial vertex of G_s , we have $v_{i_{s-1}}, v_{i_{s+1}} \in N(v_{i_s})$ implying $v_{i_{s-1}}v_{i_{s+1}} \in E(G)$, contradicting that P is a shortest path.

($\Rightarrow$) Suppose G is k -connected, but $|N_{G_i}(v_i)| < k$ for some $1 \leq i \leq n - k$. Then σ' obtained from σ by deleting all vertices in $N_{G_i}(v_i)$ is a simplicial elimination order of $G' = G - N_{G_i}(v_i)$ which is connected. By the claim above, there is a shortest v_i - $v_{n'}$ path $(v_{i_1}, v_{i_2}, \dots, v_{i_r})$ in G' with $i = i_1 < i_2 < \dots < i_r = n'$. This is impossible as v_{i_2} is a neighbor of v_i in $G - N_{G_i}(v_i)$.

($\Leftarrow$) Suppose $|N_{G_i}(v_i)| \geq k$ for $1 \leq i \leq n - k$. For any subset $S \subseteq V(G)$ of size less than k , let $v_{n'}$ be the vertex of $V(G) - S$ with largest index. Then, any vertex v_i of $G - S$ other than $v_{n'}$ should have at least one neighbor v_{i^*} not in S and $i < i^*$. Consequently, every vertex v_i in $G - S$ has a path connecting to $v_{n'}$. Therefore, $G - S$ is connected. This gives the k -connectivity of G . $\square$

Now, suppose $(v_1, v_2, \dots, v_n)$ is a strong elimination order of G . For any neighbor v_j of v_i with $j > i$, let $\ell(v_i, v_j) = k$ be the minimum index such that $v_k \in N_G[v_i] \cap N_G[v_j]$. Notice that $\ell(v_i, v_j)$ always exists. For the case when v_i and v_j has no common neighbors with indices smaller than i we have $\ell(v_i, v_j) = i$. The *closest neighbor* of a vertex v_i is the vertex $v_{i^*} \in N_{G_i}(v_i)$ such that $\ell(v_i, v_{i^*}) \leq \ell(v_i, v_j)$ for all $v_j \in N_{G_i}(v_i)$, while tie breaks by choosing i^* minimum.

In the following, we give an algorithm to determine whether a strongly chordal graph has a locally connected spanning tree, and to produce one when the answer is positive. The algorithm first choose $v_{n-1}v_n$ as an edge of the desired tree. It then iterates for i from $n - 2$ back to 1 by adding the edge $v_iv_{i^*}$ into the tree. To ensure the 2-connectivity of the graph G , according to Lemma 3, we check if $|N_{G_i}(v_i)| \geq 2$. When the answer is negative, the graph is not 2-connected and so has no locally connected spanning tree.

Algorithm Strongly-Chordal.

Input: A strongly chordal graph G of order $n \geq 3$ with a strong elimination order $(v_1, v_2, \dots, v_n)$.

Output: A locally connected spanning tree T_1 of G if it exists, and “NO” otherwise.

1. For $i = 1$ to n do
 Sort $N_G(v_i)$ into $v_{i_1}, v_{i_2}, \dots, v_{i_{d_i}}$, where $i_1 < i_2 < \dots < i < i_{p_i} < \dots < i_{d_i}$.
2. For $i = 1$ to n do $v_{i^*} = 0$.
3. For $j = 1$ to n do
 If $v_{j^*} = 0$, then $v_{j^*} = v_{j_{p_j}}$.
 For $k = p_j$ to $d_j - 1$ do
 If $v_{(j_k)^*} = 0$, then $v_{(j_k)^*} = v_{j_{k+1}}$.
4. If v_{n-1} is adjacent to v_n , then let $T_{n-1} = v_{n-1}v_n$, else return “NO”.
5. For $i = n - 2$ to 1 step by -1 do
 If $|N_{G_i}(v_i)| \leq 1$, then return “NO”, else let $T_i = T_{i+1} + v_iv_{i^*}$.
6. Return T_1 .

Notice that we may use “ $T_{n-1} = v_{n-1}v_n$ ” in step 4 of the algorithm, as $|N_{G_{n-2}}(v_{n-2})| \geq 2$ implying that v_{n-1} is adjacent to v_n . Also, $v_{(n-1)^*} = v_n$, and so we can interpret step 4 as “ $T_n = \phi$ and $T_{n-1} = T_n + v_{n-1}v_{(n-1)^*}$ ”.

Theorem 4 *For a strongly chordal graph G with a strong elimination order provided, Algorithm Strongly-Chordal determines in linear-time whether G has a locally connected spanning tree, and produces one if the answer is positive.*

Proof. We first claim that steps 1 to 3 give the closest neighbor v_{i^*} of each v_i . Notice that step 1 sorts the neighbors of each vertex first. For the case when there are no $i_r < i < i_s$ with v_{i_r} adjacent to v_{i_s} , the closest neighbor v_{i^*} is the neighbor of v_i of minimum index which is larger than i , namely $v_{i_{p_i}}$. For the other case, v_{i^*} is obtained by finding a minimum index j such that $i = j_k$ and $i^* = j_{k+1}$ for some k with $p_j \leq k \leq d_j - 1$. These are taken care of in steps 2 and 3.

When the algorithm returns a “NO”, according to Lemmas 3 and 1, the graph G has no locally connected spanning tree. We now assume that the algorithm returns T_1 . In this case, $|N_{G_i}(v_i)| \geq 2$ for all $i \leq n - 2$. By Lemma 3, G is 2-connected. We first claim that T_{i+1} has an edge $v_j v_{i^*}$ whose end vertices are neighbors of v_i for $i \leq n - 2$.

When $v_{i^*} = v_{i_{d_i}}$, let $v_j = v_{i_{d_i-1}}$. Since v_j and v_{i^*} are neighbors of v_i with $i < j < i^*$, we have $v_j v_{i^*} \in E(G)$ and $\ell(v_j, v_{i^*}) \leq i$. If $v_{j^*} = v_{i^*}$, then T_{i+1} has an edge $v_j v_{i^*} = v_j v_{j^*}$ whose end vertices are neighbors of v_i as desired. Now, suppose $v_{j^*} \neq v_{i^*}$. By the choice of v_j , we have that v_{j^*} is not a neighbor of v_i . And so $\ell(v_j, v_{j^*}) < \ell(v_j, v_{i^*}) \leq i$. Let $k = \ell(v_j, v_{j^*})$. Then $v_i \in N_{G_k}[v_j] \subseteq N_{G_k}[v_{j^*}]$, which violates that v_{j^*} is not a neighbor of v_i .

When $v_{i^*} = v_{i_r}$ with $r < d_i$, consider the closest neighbor $v_{i^{**}}$ of v_{i^*} . Let $k = \ell(v_{i^*}, v_{i^{**}})$. Then, we have $k = \ell(v_{i^*}, v_{i^{**}}) = \ell(v_{i_r}, v_{(i_r)^*}) \leq \ell(v_{i_r}, v_{i_{d_i}}) \leq i$. It follows that $v_i \in N_{G_k}[v_{i^*}] \subseteq N_{G_k}[v_{i^{**}}]$, and so T_{i+1} has an edge $v_{i^*} v_{i^{**}}$ whose end vertices are neighbors of v_i as desired.

We shall prove that T_i is a locally connected spanning tree of G_i for each i by induction on i from n back to 1. The assertion is clearly true for $i \geq n - 1$. Suppose T_{i+1} is a locally connected spanning tree of G_{i+1} . To see T_i is a locally connected spanning tree of G_i , we only need to verify that $G_i[N_{T_i}(v_i)]$ and $G_i[N_{T_i}(v_{i^*})]$ are connected as $T_i = T_{i+1} + v_i v_{i^*}$. Since v_i is a leaf in T_i , $G_i[N_{T_i}(v_i)]$ is connected. According to the facts that $G_{i+1}[N_{T_{i+1}}(v_{i^*})]$ is connected and that T_{i+1} has an edge connecting v_{i^*} and a neighbor of v_i in G_{i+1} for $i \leq n - 2$, it follows that $G_i[N_{T_i}(v_{i^*})]$ is connected.

These prove the correctness of the algorithm.

We finally argue that the time complexity for the algorithm is linear. In step 1, we may

sort the neighbors of each v_i by adding v_i into the adjacent list of each neighbor of v_i from $i = 1$ to n . So totally, step 1 takes $O(n + m)$ time. It is easy to see that the other steps also take linear time. $\square$

Corollary 5 *If G is a strongly chordal graph, then G has a locally connected spanning tree T if and only if it is 2-connected.*

3 Algorithm for proper circular-arc graphs

This section establishes a linear-time algorithm for determining whether a proper circular-arc graph has a locally connected spanning tree, and producing one if the answer is positive. First, some preliminaries on circular-arc graphs.

A *circular-arc graph* G is the intersection graph of a family F of arcs in a circle, with vertices of G corresponding to arcs in F and two vertices in G are adjacent if and only if their corresponding arcs in F overlap. McConnell [10, 11] gave a linear-time algorithm to recognize circular-arc graphs. As a byproduct, an intersection model F of circular-arc graph G can be constructed in linear time. A family F is said to be *proper* if no arc in F is contained in another.

For a vertex v of G , let $a(v)$ denote the corresponding arc in F . An arc $a(v)$ that begins at endpoint $h(v)$ and ends at endpoint $t(v)$ in a counterclockwise traversal is denoted by $[h(v), t(v)]$, where $h(v)$ is the *head* of $a(v)$ and $t(v)$ is the *tail* of $a(v)$. Assume without loss of generality that all arc endpoints are distinct and no arc covers the entire circle. A *segment* (s, t) of a circle is the continuous part that begins at endpoint s and ends at endpoint t in a counterclockwise traversal. The segment (s, t) is considered as not containing points s and t and segment $[s, t]$ is considered as containing s and t . Similarly, $[s, t)$ and $(s, t]$ are segments containing s but not t ; and not containing s but t . The *density* $d(v)$ of the arc $a(v)$ is the number of arcs, including $a(v)$, in F that contain $h(v)$.

First, a lemma on circular-arc graphs.

Lemma 6 *If a circular-arc graph G has at least four corresponding arcs with $d(v) \leq 2$ in F , then G has no locally connected spanning tree.*

Proof. Suppose $a(v_p)$, $a(v_q)$, $a(v_r)$ and $a(v_s)$ are four arcs of F with density at most 2 in a counterclockwise traversal, see Figure 2. Let $a(v_{p'})$, $a(v_{q'})$, $a(v_{r'})$ and $a(v_{s'})$ be the arcs which contain the heads of $a(v_p)$, $a(v_q)$, $a(v_r)$ and $a(v_s)$, respectively. We assume that $a(v_{p'})$, $a(v_{q'})$, $a(v_{r'})$ or $a(v_{s'})$ is empty when $d(v_p)$, $d(v_q)$, $d(v_r)$ or $d(v_s)$ is 1, respectively.

If $a(v_{p'})$ exists and contains $h(v_s)$, i.e. $a(v_{p'}) = a(v_{s'})$, then $v_{p'}$ is a cut-vertex of G since no arc in $F - \{a(v_{p'})\}$ crosses the points $h(v_p)$ and $h(v_s)$. In this case, G has no locally connected spanning tree. So, we may assume that $a(v_{p'})$ does not cross $h(v_s)$. Similarly, we may assume that $a(v_{p'})$ does not cross $h(v_q)$. Then, $a(v_{p'})$ is contained in $[h(v_s), h(v_q))$. Similarly, if $a(v_{r'})$ exists then it is contained in $[h(v_q), h(v_s))$. Therefore, $a(v_{p'})$ and $a(v_{r'})$ do not overlap, which implies that $v_{p'}v_{r'}$ is not an edge of G . Again, $\{v_{p'}, v_{r'}\}$ is a separating set of G , since no arc in $F - \{a(v_{p'}), a(v_{r'})\}$ crosses the points $h(v_p)$ and $h(v_r)$. According to Lemma 1, G has no locally connected spanning tree as $v_{p'}v_{r'} \notin E(G)$. Notice that the proof covers the case when $a(v_{p'})$ or $a(v_{r'})$ is empty. $\square$

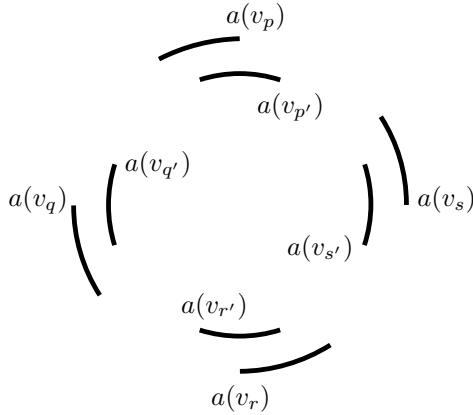


Figure 2: Graph G with four corresponding arcs of density at most 2.

Suppose G is a circular-arc graph in which $d(v) = 1$ for some vertex v , then G is in fact an interval graph. In this case, results in the previous section can be used to determine whether G has a locally connected spanning tree as interval graphs are strongly chordal. Notice

that the ordering from left to right of the right endpoints of the intervals in an interval representation of G is a strong elimination order. Therefore, without loss of generality, we may assume that $d(v) \geq 2$ in F for each vertex v of G .

We now turn attention to the algorithm for finding locally connected spanning trees on proper circular-arc graphs. In this case, if we identify $a(v_1)$, then let $(a(v_2), a(v_3), \dots, a(v_n))$ be the ordering of arcs in $F - \{a(v_1)\}$ such that $h(v_i)$ is encountered before $h(v_j)$ in a counterclockwise traversal from $h(v_1)$ if $i < j$. Since $d(v) \geq 2$ for all vertices v , it is the case that G is 2-connected as $(v_1, v_2, \dots, v_n, v_1)$ is a Hamiltonian cycle.

By Lemma 6, if G has at least four corresponding arcs with $d(v) = 2$ in F , then G has no locally connected spanning tree. Therefore, we only need to treat the case when G has at most three corresponding arcs in F with density equal to 2. We divide the problem into three cases. For the case when G has at most one corresponding arc in F with density equal to 2, the algorithm is similar to the one for interval graphs. For the cases G has two or three, the graph G has special structures, we design algorithm by using these properties.

Algorithm Proper-Circular-Arc.

Input: A proper circular-arc graph G of order $n \geq 3$ and with an intersection model F such that $d(v) \geq 2$ for all vertices v .

Output: A locally connected spanning tree T of G , if it exists, and “NO” otherwise.

1. If G has at least four corresponding arcs in F with density equal to 2, then return “NO”.
2. If G has at most one corresponding arc in F with density equal to 2.
 - (a) If G has one corresponding arc in F with density equal to 2, then let $a(v_1)$ contain its head in F . Otherwise, let $a(v_1)$ be an arbitrary arc in F .
 - (b) Let $T_1 = \phi$. Let $T_i = T_{i-1} + v_i v_{i-1}$ for $i = 2$ to n .
3. If G has exactly two corresponding arcs in F with density equal to 2.
 - (a) If the two arcs overlap. Let $a(v_1)$ and $a(v_2)$ be the two arcs in F such that $a(v_1)$ contains the head of $a(v_2)$. Do step 2(b).
 - (b) Otherwise, suppose $a(v_1)$ and $a(v_k)$ contain the heads of the two arcs, respectively. We may assume that $a(v_1)$ contains the head of $a(v_k)$, if they overlap. If v_1 and v_k have no common neighbor v_z with $z > k$ or $v_1 v_k \notin E(G)$, then return “NO”. Otherwise, let $T = \{v_1 v_i \mid i = 2, \dots, k \text{ or } i = z\} \cup \{v_z v_i \mid i = k + 1, \dots, n \text{ but } i \neq z\}$.

4. If G has exactly three corresponding arcs in F with density equal to 2.
 - (a) Suppose $a(v_1)$, $a(v_p)$ and $a(v_q)$ contain the heads of the three arcs in a counter-clockwise traversal, respectively.
 - (b) If all of $\{v_1, v_p\}$, $\{v_1, v_q\}$ and $\{v_p, v_q\}$ are separating sets of G or one of the three edges v_1v_p , v_1v_q and v_pv_q does not belong to $E(G)$, then return “NO”. Otherwise, we may assume that $\{v_p, v_q\}$ is not a separating set of G .
 - (c) Let $T = \{v_1v_i \mid i = 2, \dots, n\}$.
5. Return T .

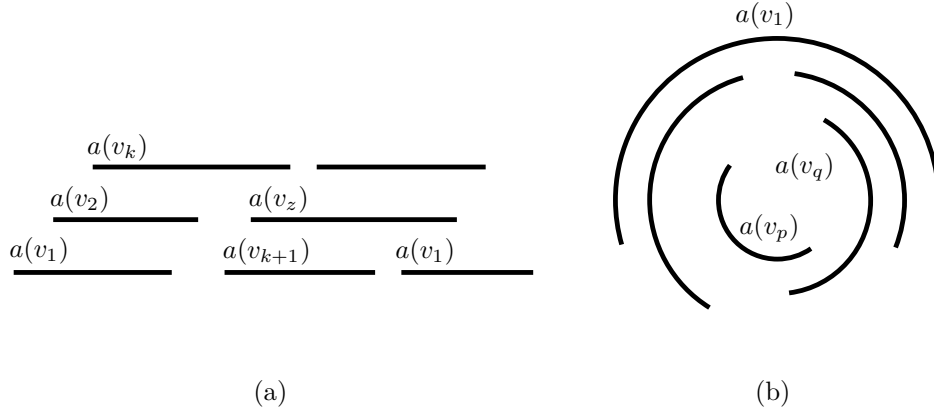


Figure 3: Two examples for Algorithm Proper-Circular-Arc. (a) G contains exactly two corresponding arcs in F with density equal to 2. (b) G contains exactly three corresponding arcs in F with density equal to 2.

Now, we prove the correctness of the above algorithm. If the algorithm outputs a tree T , we verify that it is a locally connected spanning tree. Otherwise, we show that G lacks one necessary condition of having a locally connected spanning tree. In the following, let $G_i = G[\{v_1, v_2, \dots, v_i\}]$.

Lemma 7 *Algorithm Proper-Circular-Arc outputs a locally connected spanning tree T of G , if it exists.*

Proof. By Lemma 6, if G has at least four corresponding arcs with $d(v) = 2$ in F , then G has no locally connected spanning tree. Therefore, we need only to consider the cases when G has at most three corresponding arcs with $d(v) = 2$ in F .

We first consider the case when G has at most one corresponding arc in F with density equal to 2. Notice that if v_i has k neighbors in G_i , then the neighbors of v_i are $v_{i-1} \dots, v_{i-k}$. Since $d(v_i) \geq 3$, the vertex v_i has at least 2 neighbors v_{i-1} and v_{i-2} in G_i for $i \geq 3$. We shall prove that T_i is a locally connected spanning tree of G_i by induction on i . The claim is true for T_2 . By the induction hypothesis, T_{i-1} is a locally connected spanning tree of G_{i-1} and so $G_{i-1}[N_{T_{i-1}}(v_{i-1})]$ is connected. We know that T_{i-1} contains an edge connecting v_{i-1} and v_{i-2} in G_{i-1} for $i \geq 3$ as we have $T_{i-1} = T_{i-2} + v_{i-1}v_{i-2}$. Since v_{i-1} and v_{i-2} are neighbors of v_i , $G_i[N_{T_i}(v_{i-1})]$ and $G_i[N_{T_i}(v_i)]$ are connected, T_i is a locally connected spanning tree of G_i .

Next, consider the case when G has two corresponding arcs in F with density equal to 2. If the two arcs overlap, we have $d(v_1) = d(v_2) = 2$ and $d(v_i) \geq 3$ for $i \geq 3$. The remainder of the proof for this case is similar to the above case. Otherwise, we have $d(v_2) = d(v_{k+1}) = 2$ and the two vertices v_2 and v_{k+1} are in different component of $G - \{v_1, v_k\}$. See Figure 3(a) for an example. By Lemma 2, if v_1 and v_k do not have common neighbor v_z with $z > k$, then G has no locally connected spanning tree. For the case when such v_z exists, we prove that the output T is a locally connected spanning tree in this case by showing that each edge in T is also in $E(G)$ and the two components $G[N_T(v_1)]$ and $G[N_T(v_z)]$ are connected. Consider $v_1v_k \in E(G)$. Since $a(v_1)$ contains the head of $a(v_k)$, the arc $a(v_i)$ would also contain $h(v_k)$ for $1 < i < k$. It follows that $v_iv_1, v_iv_k \in E(G)$ for $1 < i < k$. Notice that v_z is a common neighbor of v_1 and v_k with $z > k$. Therefore, each vertex in $N_T(v_1)$ is adjacent to v_1 in G and $G[N_T(v_1)]$ is connected. Since $a(v_z)$ contains the tail of $a(v_k)$ and the head of $a(v_1)$, $a(v_i)$ would also contain $t(v_k)$ for $k < i < z$ and $a(v_i)$ would also contain $h(v_1)$ for $z < i \leq n$. It follows each vertex in $N_T(v_z)$ is also adjacent to v_z in G and both of the two components $G[v_{k+1}, \dots, v_{z-1}]$ and $G[v_{z+1}, \dots, v_n, v_1]$ are connected. Since the density of $a(v_{z+1})$ is at least 3, vertex v_{z-1} is adjacent to v_{z+1} , where $v_{z+1} = v_1$ if $z = n$. Therefore, $G[N_T(v_z)]$ is connected.

Finally, consider the case when G has three corresponding arcs in F with density equal to 2. Choose any two vertices of $\{v_1, v_p, v_q\}$, if one does not succeed another in a counterclockwise traversal, the two vertices form a separating set of G . If all of $\{v_1, v_p\}$, $\{v_1, v_q\}$ and $\{v_p, v_q\}$ are separating sets of G , then T should contain the cycle (v_1, v_p, v_q) . Thus, the two vertices is either a separating set of G or one succeeds another in a counterclockwise traversal. It follows that the three edges v_1v_p , v_1v_q and v_pv_q should belong to $E(G)$ and at least one of the three sets is not a separating set, if G contains a locally connected spanning tree. To see the output T is a locally connected spanning tree of G in this case, it suffices to show that $G - v_1$ is connected and G contains edges containing v_1 and v_i for $i \geq 2$. Consider the case when G contains the three edges v_1v_p , v_1v_q and v_pv_q , and $\{v_p, v_q\}$ is not a separating set of G , i.e., $q = p+1$. See Figure 3(b) for an example. Since $a(v_p)$ contains the tail of $a(v_1)$ and $a(v_q)$ contains the head of $a(v_1)$, $a(v_i)$ contains $t(v_1)$ for $2 \leq i \leq p$ and $a(v_i)$ contains $h(v_1)$ for $q \leq i \leq n$. Therefore, $v_iv_1 \in E(G)$ for $2 \leq i \leq n$ and the two components $G[v_2, \dots, v_p]$ and $G[v_q, \dots, v_n]$ are connected. Since v_p and v_q are adjacent, $G - v_1$ is connected. $\square$

Now, we prove the algorithm runs in linear time. Recognizing the corresponding arcs in F whose density are equal to 2 and determining the order $(v_1, v_2, \dots, v_n)$ could be done by traversal the intersection model F in counterclockwise order, which takes $O(n)$ time. Therefore, Step 1 takes linear time. Notice that, if the arcs with density equal to 2 are recognized, constructing a locally connected spanning tree in the three difference cases all take $O(n)$ time. Step 2 takes linear time. Consider the Step 3. It takes $O(1)$ time to check whether $a(v_1)$ and $a(v_k)$ are overlap and takes $O(n)$ time to check whether there exists a common neighbor v_z with $z > k$. Step 3 takes $O(n)$ time. It also takes constant time to determine whether any two vertices of $\{v_1, v_p, v_q\}$ is a separating set of G by checking whether one succeeds another in a counterclockwise traversal. Thus, this algorithm runs in linear time.

Theorem 8 *For a proper circular-arc graph G with an intersection model F provided, Algorithm Proper-Circular-Arc determines in linear-time whether G has a locally connected spanning tree, and produces one if the answer is positive.*

4 Conclusion

In this paper, we present two algorithms for finding locally connected spanning trees on strongly chordal graphs and proper circular-arc graphs, respectively. The former answers an open problem proposed by Cai [3]. It is an interesting problem to design an algorithm for finding locally connected spanning trees on circular-arc graphs or to prove that it is NP-complete.

References

- [1] R. P. Anstee and M. Farber. Characterizations of totally balanced matrices. *Journal of Algorithms*, 5(2):215–230, 1984.
- [2] L. Cai. On spanning 2-trees in a graph. *Discrete Applied Mathematics*, 74(3):203–216, 1997.
- [3] L. Cai. The complexity of the locally connected spanning tree problem. *Discrete Applied Mathematics*, 131(1):63–75, 2003.
- [4] M. Farber. Characterizations of strongly chordal graphs. *Discrete Math.*, 43(2-3):173–189, 1983.
- [5] A. M. Farley. Networks immune to isolated failures. *Networks*, 11:255–268, 1981.
- [6] A. M. Farley and A. Proskurowski. Networks immune to isolated line failures. *Networks*, 12:393–403, 1982.
- [7] M. C. Golumbic. *Algorithmic Graph Theory and Perfect Graphs*. Academic Press, New York, 1980.
- [8] A. J. Hoffman, A. W. J. Kolen, and M. Sakarovitch. Totally-balanced and greedy matrices. *SIAM J. Algebraic Discrete Methods*, 6(4):721–730, 1985.
- [9] A. Lubiw. Doubly lexical orderings of matrices. *SIAM J. Comput.*, 16(5):854–879, 1987.
- [10] R. M. McConnell. Linear-time recognition of circular-arc graphs. In *42nd IEEE Symposium on Foundations of Computer Science*, pages 386–394. IEEE, 2001.
- [11] R. M. McConnell. Linear-time recognition of circular-arc graphs. *Algorithmica*, 37(2):93–147, 2003.

- [12] R. Paige and R. E. Tarjan. Tree partition refinement algorithms. *SIAM J. Comput.*, 16:973–989, 1987.
- [13] J. P. Spinrad. Doubly lexical ordering of dense 0-1 matrices. *Inform. Process. Lett.*, 45(5):229–235, 1993.
- [14] J. A. Wald and C. J. Colbourn. Steiner trees, partial 2-trees, and minimum IFI networks. *Networks*, 13:159–167, 1983.